


光滑特氟龙单管

AX-001

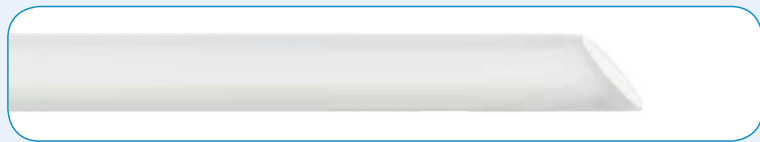

应用:

适用于高纯度产品，食品，化学品，日化 and 化妆品行业，也适用于热交换器和电缆的保护套。

技术参数:

- 口径: 2" 以内的任意尺寸均可提供
- 工作温度: -70°C至+260°C
- 标准与防静电内衬可供选择
- PTFE单管，坚固、灵活及高透明性使得该软管成为了众多行业的理想选择

适用标准及认证:

- FDA 21CFR 177.1550, USP

Applications:

Suitable for high purity products, food, chemicals and cosmetics industries, and also for the protection of heat exchanger and cable.

Technical description:

- Range DN01 - DN50, full range of imperial & metric sizing available
- Temperature range: -70°C to +260°C
- Virgin and anti-static tubing available upon request robust and flexible offering the legendary benefits of genuine PTFE

Standard/Approval:

- FDA 21CFR 177.1550, USP

光滑特氟龙单管

AX-001

产品编码 No.	内径		外径		壁厚 mm	工作压力 bar	爆破压力 bar	包装长度 m
	min	max	min	max				
AX-001-0040	1	1.20	3	3.15	1.0	30	90	100
AX-001-0080	2	2.20	4	4.15	1.0	23	69	100
AX-001-0120	3	3.20	5	5.15	1.0	18	54	100
AX-001-0160	4	4.20	6	6.15	1.0	15	45	250
AX-001-0200	5	5.25	7	7.15	1.0	13	39	225
AX-001-0240	6	6.25	8	8.15	1.0	11	33	200
AX-001-0310	8	8.30	10	10.15	1.0	9	27	150
AX-001-0380	10	10.30	12	12.15	1.0	8	24	125
AX-001-0470	12	12.35	14	14.15	1.0	7	21	100
AX-001-0550	14	14.35	16	16.15	1.0	6	18	85
AX-001-0630	16	16.40	18	18.15	1.0	5	15	75
AX-001-0710	18	18.40	20	20.15	1.0	5	15	70
AX-001-0790	20	20.40	22	22.20	1.0	4	12	60
AX-001-0870	22	22.50	25	25.20	1.5	6	18	35
AX-001-1000	25	25.50	28	28.20	1.5	5	15	33
AX-001-1020	26	26.50	28	28.20	1.0	3	9	20
AX-001-1180	30	30.50	34	34.20	2.0	6	18	20
AX-001-1250	32	32.50	36	36.20	2.0	5	15	20
AX-001-1500	38	38.50	42	42.20	2.0	4	12	20
AX-001-1580	40	40.50	44	44.20	2.0	4	12	20
AX-001-1750	44	44.50	50	50.20	3.0	6	18	20
AX-001-1890	48	48.50	52	52.20	2.0	4	12	20
AX-001-2000	50	50.50	54	54.20	2.0	3	9	15

防静电型单管可供选择

